


Features

- Slim line LED driver
- Input Voltage 200-240VAC
- Input Frequency 50/60Hz
- Open Circuit; Short Circuit; Over Load
- Over Head Protection
- IP20

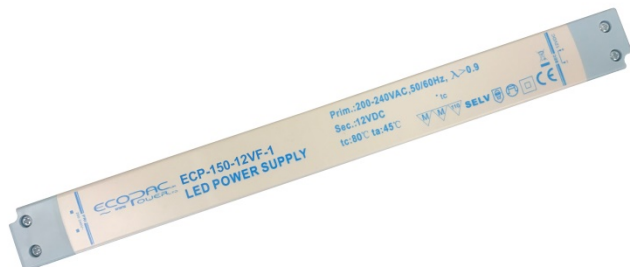

Model No.		ECP150-12VF-1	ECP150-24VF-1
Output	Output Voltage	12V	24V
	Output current	11A	6.25A
	Output Wattage	0-132W	0-150W
Input	Input Voltage	180-264VAC	
	Input Frequency Range	50-60Hz	
	Power Factor	≤0.90	
	No Load Power Consumption	0.21W Max	
	In-Rush Current	60A Max	
	Input Current	0.1A Max	
	Efficiency	<90%	
Protections	Over Load	Ta, 0.94-1.06 time of input voltage, 1.6 times of rated power	
	Short Circuit	Ta, 0.94-1.06 times of input voltage	
	Over Temperature	Ta, 0.94-1.06 times of input voltage temperature detected pointed more than 115 degree	
Environment	Working humidity	45%-85%	
	Working Temperature	20°C-45°C	
Safety & EMC	Safety standards	EN61347-1, EN61347-2-13	
	EMC Emission	EN55015	
	EMC Immunity	EN61000-3-2; EN61000-4-2, 3, 4, 5, 6 EN61547	
Others	Dimensions	322.6x 30.1x 21.5mm	

Mechanical Specification

