



ELED-200-24D



ELED-180-12D



Features:

- Dali dimmable
- Constant voltage design
- Universal AC input/ Full range
- IP66 design for indoor or outdoor installations
- Protections: Short circuit/ Overload/ Over voltage/ Over temperature
- Built-in PFC function (PFC>0.98)
- Cooling by free air convection
- Over 85% efficiency

Model		ELED-180-12D	ELED-200-24D
Output	DC Voltage	12V	24V
	Rated current	15A	8.33A
	Voltage Accuracy	±0.5V	±0.5V
	Rated power	180W	200W
Input	Voltage Range	100-265VAC	
	Frequency Range	47-63HZ	
	Power Factor (Typ.)	PF ≥ 0.98/220V	
	Full Load Efficiency(Typ.)	87%	89%
	AC Current(Typ.)	0.960A/220VAC	1.042A/220VAC
	Leakage current	<0.7mA/220VAC	
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.	
	Over voltage	≤280VAC	
	Over temperature	100°C ± 10°C shut down o/p voltage, re-power on to recover	
Environment	Working TEMP.	-40~+60°C	
	Working Humidity	20~95%RH,non-condensing	
	Storage TEMP., Humidity	-40~+80°C,10~95%RH	
	TEMP. coefficient	±0.03%/°C(0~50°C)	
	Vibration	10~500Hz,5G 12min./1 cycle, period for 72min.each along X,Y,Z axes.	
Safety&EMC	Safety standards	EN61347-2-13.IP66	
	Withstand voltage	I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC	
	Isolation resistance	I/P-O/P I/P-FG O/P-FG:100MΩ/500VDC/25°C/70%RH	
	EMC EMISSION	Compliance to EN55015,EN61000-3-2 (≥ 50%load)	
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8, 11,EN61547,A light industry level	
Others	Dimesnions	255*80*53mm(L*W*H)	
	Packing	1.8Kg; 8pcs/15.5Kg	

Mechanical Specification

ELED-180-12D

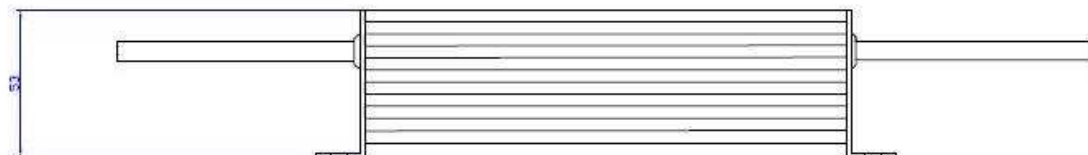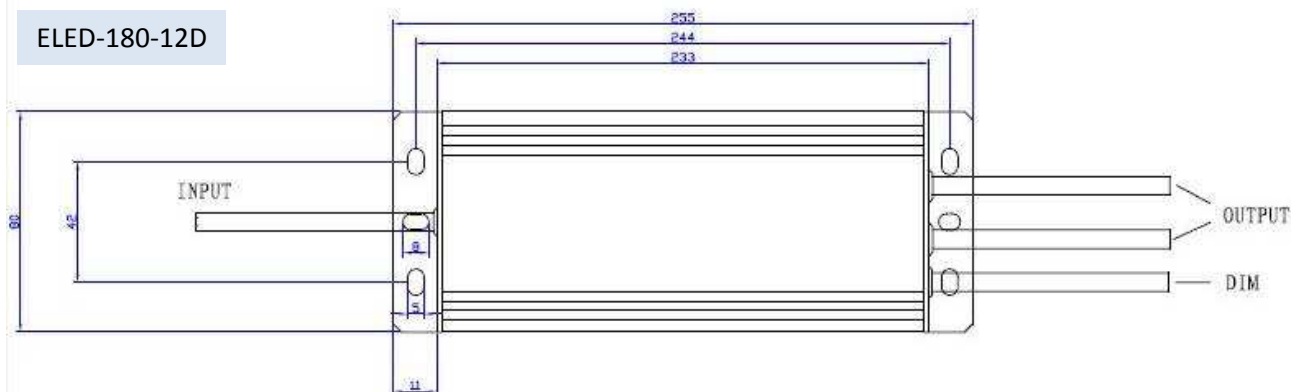

ELED-200-24D

